

KEI Industries Limited

REGISTERED AND CORPORATE OFFICE:

D-90, OKHLA INDUSTRIAL AREA PHASE-I, NEW DELHI-110020, TEL: +91-11-26818840/8642/0242 FAX: 26817225, 26811959

E-MAIL: info@kei-ind.com WEBSITE: www.kei-ind.com CIN NO: L74899DL1992PLC051527

Manufacturing Units

Bhiwadi
KEI Industries Limited
SP-919/920/922, Ricco Industrial Area,
Phase-III, Bhiwadi, Distt. Alwar-301019 Rajasthan
Tel: +91-1493-220106/221731
Fax: 221731 E-Mail: bhiwadi@kei-ind.com

Pathredi
KEI Industries Limited
Plot No.SP2-874, Ind. Area Pathredi-301019
Bhiwadi (Alwar) Rajasthan (India) Tel: 9828588579

Silvassa
KEI Industries Limited
99/2/7, Madhuban Industrial Estate, Rakholi,
Silvassa-396230 Dadra & Nagar Haveli
Tel: +91-260-2644404/2630944
Fax: 2645896 E-Mail: silvassa@kei-ind.com

Chinchpada
KEI Industries Limited
Survey No. 1/1/2/5, Village Chinchpada,
Silvassa-396230, Dadra Nagar Haveli (UT)
Tel: 7574881215 E-Mail: silvassa@kei-ind.com

Chopanki
KEI Industries Limited
A-280/281/282/283/284, Ricco Industrial Area
(Chopanki) Distt. Alwar-301019 Rajasthan
Tel: +91-1493-260202/06 Fax: 260203
E-mail: chopanki@kei-ind.com

Marketing Offices (India)

WEST

Marketing Office-Mumbai
KEI Industries Limited
Nirvan Corporate, 7th Floor, Opposite Aghadi Nagar,
Pump House, Jijamata Road, Andheri East,
Mumbai-400093
Tel: +91-22-28239673, 28375642
Fax: +91-22-28258277 E-mail: mumbai@kei-ind.com

Ahmedabad
KEI Industries limited
301, Sarthik Complex, Opp. ISCON BRTS,
Satellite Road, Ahmedabad-380015, Tel: 9825795673
E-Mail: dharmin.maniar@kei-ind.com, ahmedabad@kei-ind.com

Pune
KEI Industries Limited
Vasudha Equinox, Office No. 104, 1st Floor,
Mouje Bopodi, Near Khadki Railway Station, Pune-411003
Tel: 9922722378
E-Mail: srivastav.prashant@kei-ind.com

Nagpur
KEI Industries Limited
103, Misal Layout, Near Maharashtra School
Nagpur - 440014 E-Mail: nagpur@kei-ind.com
Mr. Saranjeet S. Kohli, Tel: +91-9822473774
E-Mail: saranjeet.kohli@kei-ind.com

Kolhapur
KEI Industries Limited, 776/ 3/6 AmarnathHights Building,
Near AmarnathMandir Ganesh Colony, Kalamba Road,
Kolhapur - 416007
Mr. Rajaram B. Kamble Tel: 9371104263 / 8291918940
E-Mail: kolhapur@kei-ind.com, rajaram.kamble@kei-ind.com

NORTH

Jaipur
KEI Industries Limited
Shivam Business Center, 405, 4th Floor,
Calgary Hospital Road, Pradhan Marg,
Malviya Nagar, Jaipur - 302017 (Rajasthan)
Phone No. + 91 141 5179279 Fax: +91 141 252 9404
Tel: +91 99290 93711 E-Mail: jaipur@kei-ind.com

Chandigarh
KEI Industries Limited
SCO 17, 1st Floor, Swastik Vihar, MDC, Sector-5,
Panchkula-134109 Tel: +91-172-4416301, 4416300,
9872974996, 9872581422 E-Mail:
chandigarh@kei-ind.com

SOUTH

Chennai
KEI Industries Limited
No.4, (Old No. 23) SIR C P Ramasamy Road,
2nd Floor, Near Apollo Spectra Hospital
Alwarpet, Chennai-600018
Tel: +91-44-42009120
Fax: +91-44-42009130; 8939768405
E-Mail: victor@kei-ind.com, chennai@kei-ind.com

Cochin
KEI Industries Limited
Ward No.18/555 and 18/556, NAD Thorappu,
Near Kuzhikkattukara Jama Masjid,
Edathala, Ernakulam, Kerala – 683563
Tel: 9645096420 , E-Mail : cochin@kei-ind.com

EAST

Bhubaneshwar
KEI Industries Limited
Plot No- 139, 3rd Floor, Rose Dale District Centre,
Chandrasekharpur, Bhubaneswar-751016, Odisha
Tel: 9937033537
E-Mail: odisha@kei-ind.com

Patna
KEI Industries Limited
HIG Plot No-4H/59, Bahadurpur Housing Colony,
Lohia Nagar, Agamkuan, Patna 800026, Bihar
Tel: + 91 95348 38038, 7360042598
E-Mail: bihar@kei-ind.com

Marketing Office (Overseas)

Dubai
KEI Industries Limited
Office -27, LOB 10, PO Box – 261739, JAFZA, Dubai UAE
Tel: +971-48812310, Fax: +971-48812311, Mobile : +971-564853435
Email : dubai@kei-ind.com
Contact : Mr. Devraj Tigaiya

South Africa
KEI Cables SA (Pty) Ltd.
Unit 27-4, Fish Eagle View, 1 Benacre Lane,
Modderfontein, 1609, South Africa
Ms. Thavashnee Pillay +27 83 235 2895

Singapore
KEI Industries Limited
No.52, UBI Avenue 3, # 04-37 Frontier,
Singapore-408867 Tel: +65 83240193
Contact: Mr. Xavier Toh Hong Ghee
E-mail: xavier@kei-sin.com

Nigeria
(Marketing Representative)
E-mail: kunal.gupta@kei-ind.com
Tel: +234 809 9777786

Vapi/Silvassa/Daman
KEI Industries Limited
A1/302, Karmabhumi Residency, Behind Golden
Bakery, Nanakwada, Halar,
Valsad-396001,
Mr. Harsh Desai, Tel: 9723455316
E-Mail: harsh.desai@kei-ind.com

Raipur
KEI Industries Limited
206, 2nd Floor, Harshit Corporate, Amanaka,
G.E. Road, Raipur, Chhattisgarh-492001
Email: Chhattisgarh@kei-ind.com
Mr. Sumit Ganguly - 7581809898
Email: sumit.ganguly@kei-ind.com

Goa
KEI Industries Limited
House no: 617, Housing Board Colony,
Camurlim Moussa Goa 403507.
E-Mail: goa@kei-ind.com
Mr. Nilesh Parab - 9890452484
E-Mail: nilesh.parab@kei-ind.com

Solapur
KEI Industries Limited
Niranjan V. Deshpande
462, Om Namah Shivay Nagar, Kumthe Road,
Near Shastri Math, Hatture Vasti, Solapur. 413005
Tel: 8291918937 E-Mail: niranjan@kei-ind.com

Rajkot
KEI Industries Limited
Mr. Nitin Tank Tel: +91-8155044144
E-Mail: nitin.tank@kei-ind.com

Lucknow
KEI Industries Limited
E-79,80,81 Transport Nagar (Kanpur Road)
Lucknow (UP)-226012 Tel: 0522-4010752
E-Mail: up@kei-ind.com

Kanpur
KEI Industries Limited
15/240 F, In Front of Hotel Attic, Civil Lines, Kanpur
(UP)- 208001 Tel: 9935062910

Panipat
KEI Industries Limited
JP Tower, First Floor, Tau Devi Lal Complex
Panipat-132013 Tel: +91-9050417107
E-mail: shakti.sharma@kei-ind.com

Bangalore
KEI Industries Limited
No 15, Sirur Park Road, Sheshadripuram,
Bangalore-560020
Tel: +91-80-23466254, +91-80-23466260/55
Ph: 8884439333 E-Mail: bangalore@kei-ind.com

Hyderabad
KEI Industries Limited
Plot No. 76, H.No. 3-14-52/1, Shubodaya Colony,
Near M.E Reddy Function Hall, Mansoorabad,
Vanasthalipuram, Hyderabad-500070
Tel: +91 88860 63702, +91 99855 77886
E-Mail: hyderabad@kei-ind.com

Guwahati
KEI Industries Limited, Mangalam Plaza
Compound, Near North East Weight Bridge, NH-37
Bye Pass, Beltola, Guwahati-781029 Assam
Ruhul Gogoi – 8134846024, 9706050041
E-Mail: ruhul@kei-ind.com

Ranchi
KEI Industries Limited
Golden Camp Warehouse, Old H B Road
Kokar, Ranchi, Jharkhand - 834001
Tel: 9810492658, 8918904901
E-Mail : jharkhand@kei-ind.com

Nasik
KEI Industries Limited
4, Sanket Apartment, Tidake Colony,
Behind Hyundai Showroom, Nashik,
Maharashtra-422002
Tel: 8805369705 / 8291918949
E-Mail: ghanshyam.pardeshi@kei-ind.com

Baroda
KEI Industries Limited
803-804, Siddharth Complex, Near Hotel Express
R.C. Dutt Road, Baroda-390007
Tel: +91-265-6539719, 2341831, 9824676443,
9327476732, E-Mail: baroda@kei-ind.com,
amit.gohil@kei-ind.com

Surat
KEI Industries Limited
703, Royal Trade Centre. Opposite Star Bazar,
Adajan-Hazira Road, Adajan, Surat-395009
Tel: 09879018448, +91-261-2793279
E-Mail: rakesh.patel@kei-ind.com

Aurangabad
KEI Industries Limited
Mahesh Pandurang Akalekar, Flat No. 11, Padmini Housing Society,
Nakshtra Park, Beside Walmi Naka, Palthan Road,
Aurangabad- 431 005
Tel: 07045922707/706, 9075008151
E-Mail: aurangabad@kei-ind.com, mahesh.akalekar@kei-ind.com

Noida
KEI Industries Limited A-43 Ground Floor, Sector-64,
Noida, UP-201301 Tel: 0120-4315467

Indore
KEI Industries Limited
Plot No 451 Sch No 78 Industrial Area New Loha Mandi
Dewas Naka Indore 452010 (M.P)Tel: 9826588885

Gurgaon
KEI Industries Limited
Shop no-101 1st Floor, Radha Palace
Gurudwara Road, Gurgaon Haryana-122001
Tel: +919873561757 E-Mail: rksingh@kei-ind.com

Dehradun
KEI Industries Limited
H.No. – 329, Lane No- 13, Mohit Nagar,
Dehradun – 248001 (U.K.), Ph.: 0135-2762223,
Tel: 9756621171 E-mail: depotdehradun@kei-ind.com

Secunderabad
KEI Industries Limited
5-2-510, 2nd floor, plot no: 44, Beside Govt Primary
School, Near Bible House, Hyderabad-500031,
Secunderabad, Telangana- 500003 Tel.: 8008000583,
9963530111 E-Mail:Kiran.kumar@kei-ind.com

Coimbatore
KEI Industries Limited, SF.no. 581/A, K.N.G. Pudur Road,
Kanuvai Post S.M. Palayam Village, Coimbatore-641108
Tel: 9443324217, E-Mail: manohars@kei-ind.com

Vijayawada
KEI Industries Limited
Venkata Ramana Enclave, D.No. 48-18-2a/1,
2nd Floor -Nagarjuna Nagar Colony, 8th Lane, Behind
Sai Baba Temple, Besides Ayush Hospital Krishna
Dist., Andhra Pradesh-520008 Tel.: 8886063715
E-Mail: syed.mahamood@kei-ind.com

Kolkata
KEI Industries Limited
Arihanth Benchmark, 4th Floor 113-F Matheshwartola
Road Ps:Tiljala, Kolkata: 700046
Tel: 033-4062 0820 / 4062 0822, 9932449183
E-Mail: kolkata@kei-ind.com

Siliguri
KEI Industries Limited, 8, Balai Das Chatterjee Road,
Ground Floor, Hakimpara, (Opp. Relief Physiotherapy
Centre) Dist-Darjeeling, Siliguri-734001, West Bengal
Tel: 6292209825, E-Mail: dibyojoyti.karmakar@kei-ind.com

Korea (Local Representative)
Contact: Mr. CH Han
E-mail: ch.han@kei-ind.com
Tel: +82-10-4351-8585
Mr. TH Park
E-mail: th.park@kei-ind.com Contact : +82-10-9104-4519




KEI Wires & Cables

Co-Axial Cables

CAT 6 UTP Cables

Telephone Cables

CCTV Cables

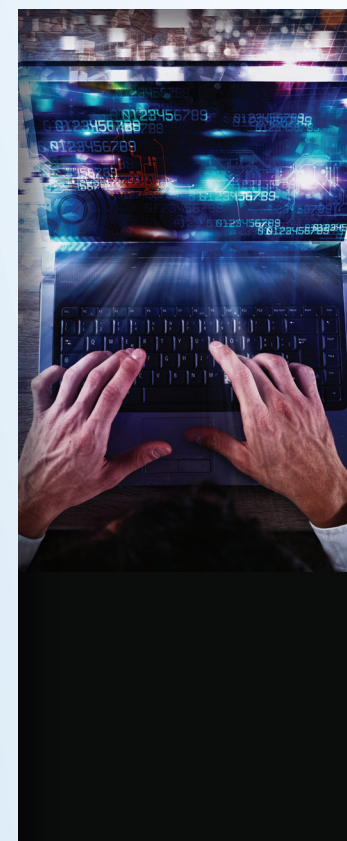

COMMUNICATION CABLES

ENABLING SUPERFAST COMMUNICATIONS



/keicables

www.kei-ind.com

KEI/CC/OCL/FEB/2022



Empowering the nex-gen of superfast communication




Established in 1968, KEI Industries Ltd. is ranked amongst the top cable manufacturing companies of the world. Through its customer focus approach and continuous quest for world class quality, KEI has emerged as an industry leader over a period of five decades. KEI is acclaimed for its strong customer support and an efficient marketing and distribution network. It has an ever growing international footprint with clients spread across 45 countries to date.

Today, KEI enjoys a premium brand imagery serving large infrastructure projects in various fields like refinery, power, petrol chemical, cement, steel, fertilizers and renewable energy sectors. Along with


this, utmost safety standards are practiced, confirming to occupational health and safety management system standards of OHSAS.

KEI has the world-class quality, skilled manpower, and most importantly, the technology to ace any new challenge that can come during transmission, distribution, and supply of electrical power. The faith and support extended by its clients usher KEI to serve yet another important and critical application-Tele-communication Cabling. We continue to innovate new and better ways to power your network's future.

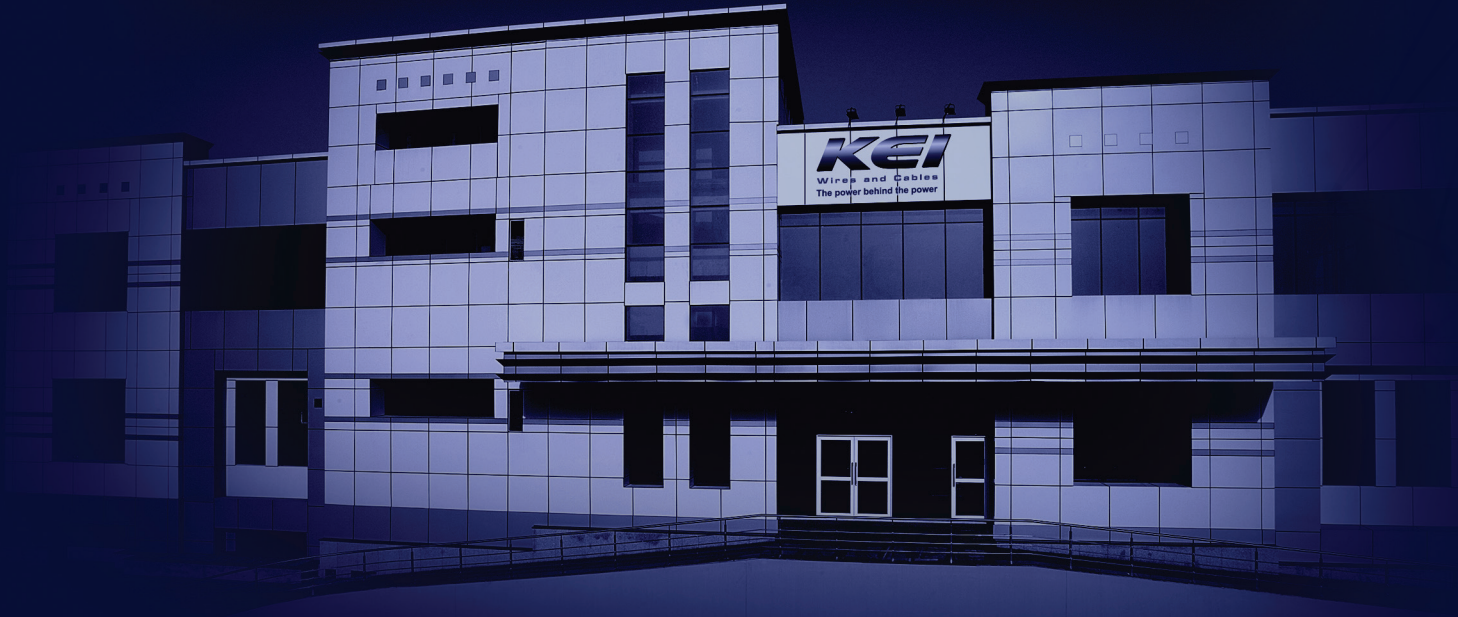

- Co- Axial Cables
- Telephone Switch Board Cables
- CAT 6 UTP Cables
- CCTV Cables

Our range

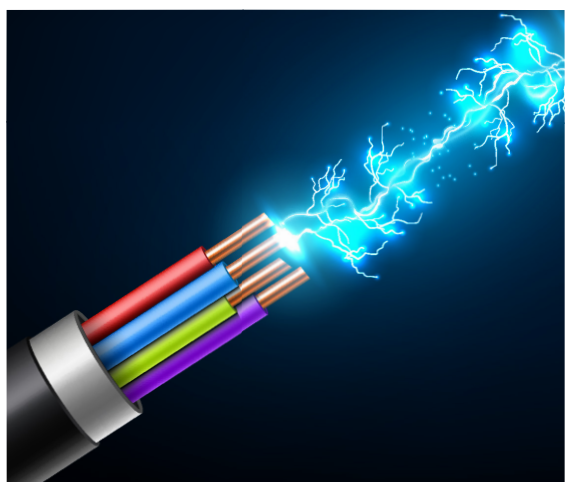

Co-Axial Cables

KEI's co-axial cables, RG59, RG6 & RG11 used in the transmission of RF signals and power for voice, data and video applications. The double-shield coaxial cable protects signals from external electromagnetic interference & solid electrolytic grade 99.97% pure copper conductor offers superior electrical performance meeting all requirements of CATV, DTH, Broadband, Digital & Analog signal applications.

Our co-axial cables are Special International Digital Designed for transmission of high frequency signals with minimum loss for DTH, Institute and Digital Headend etc. The various configurations of our cables are solid copper center conductor and also available in Copper Clad Steel (CCS), Polyethylene Foam PE, Aluminium laminated tape to provide 100% coverage, Aluminium alloy wire braids to give additional mechanical strength, Flooding Compound jelly to provide internal corrosion & water resistance properties and PVC cover to give environmentally secured safe seal to the construction. Cables tested on 3.0 Ghz spectrum analyzer.

Cable Construction

		RG59	RG6	RG11
1	a) Cable Size & Type b) Construction Details	Electrolytic grade solid bare copper conductor, foam polyethylene insulation, with laminated aluminium tape and Aluminium Alloy Wire braid, Jelly flooded and PVC Jacketing in Black colour.		
2	CONDUCTOR a) Cross Sectional Area b) Diameter (Approx)	Solid Annealed Bare Electrolytic Grade Tough Pitch (ETP) Copper (CU) conductor. Also available in Copper Clad Steel (CCS) for RG6 & RG11. 0.81mm 1.02mm 1.63mm		
3	DIELECTRIC a) Material b) Core Diameter (Approx)	Physical foam PE 3.60mm 4.60mm 7.10mm		
4	SHIELD CONSTRUCTIONS a) 1st Shield b) 2nd Shield	Bonded Al tape Aluminium alloy wire braid with Minimum 60% coverage.		
5	FLOODING COMPOUNDS a) Material	Jelly		
6	OUTER SHEATH (JACKET) a) Material b) Colour c) Nominal O.D of cable	Extruded PVC Black 6.10mm 6.93mm 10.16mm		
	OTHER DATA a) Bending radius, Minimum b) Packing Length	40mm 70mm 80mm Coil of 100 Mtrs / Spool of 305 mtrs		

Electrical Properties

CHARACTERISTICS		RG59	RG6	RG11
Maximum DC Resistance at 20°C (Ohm/100m)		3.55	2.13	0.85
Impedance (Ohm)		75 ± 3	75 ± 3	75 ± 3
Velocity of Propagation (Vp)%		Min. 82	Min. 82	Min. 82
Nominal Capacitance (pf/mtr)		53	53	53
Maximum Attenuation @ 20°C	Frequency(MHz)	(dB/100m)	(dB/100m)	(dB/100m)
	5	2.82	1.9	1.25
	55	6.73	5.25	3.15
	211	12.47	10	6.23
	250	13.45	10.82	6.72
	270	13.85	11.04	7
	300	14.60	11.64	7.38
	330	15.29	12.26	7.71
	350	15.75	12.63	7.94
	400	16.73	13.61	8.53
	450	17.72	14.43	9.02
	500	18.70	15.29	9.51
	550	19.52	16.08	9.97
	600	20.34	16.73	10.43
	750	22.87	18.54	11.97
	870	24.85	20.04	13.31
	1000	26.64	21.49	14.27

#RG- 6 & RG-11 are also available with Copper Clad Steel (CCS) conductor on request



Telephone (switch board) Cables

KEI Telephone cables are recommended for use in internal telephone wiring in high-rise buildings, offices, factories, hotels, residential complexes, etc.

KEI twisted pair cables are best suited for telephone cabling applications. The conductor is made of solid annealed, electrolytic grade high conductivity bare copper. The conductor is insulated with special grade high - density polyethylene with colour coding. The insulated cores are twisted with uniform lay to form pairs and are bunched together in such a manner so as to minimize cross talk. The cable is jacketed with a grey colour specially formulated Fire Retardant (FR) PVC with high oxygen and temperature index.


Reference Standard: ITD specifications S/WS 113C & KEI specifications




Electrical Parameters	0.4 mm Dia.	0.5 mm Dia.
Conductor Resistance (max.) Ohm/km at 20°C	143.0	92.20
Mutual Capacitance (max.) nf/km	50	50
Insulation Resistance in Air (min.) M-ohm/km	10,000	10,000
Capacitance Unbalance Pair to Pair (max.) Pf/km	250	250

Construction parameters	1 pair	2 pair	3 pair	4 pair	5 pair	10 pair
Conductor (Solid Annealed Bare Copper)	0.4 mm diameter (nom.) / 0.5 mm diameter (nom.)					
Insulation Material	Extruded High-Density Polyethylene					
Insulation Thickness (Avg.)	0.17 mm (for 0.4mm Cables) / 0.20 mm (for 0.5mm Cables)					
Diameter of Insulated Conductor (Maximum)	0.74 mm (for 0.4mm Cables) / 0.92 mm (for 0.5mm Cables)					
Rip Cord	Nylon cord placed under Jacket for easy Jacket Stripping					
PVC Jacket	Extruded FR PVC Compound (Grey Colour)					
Approx. Outer Diameter in mm (0.4 mm cables)	2.30	2.90	3.40	3.80	4.20	6.20
Approx. Outer Diameter in mm (0.5 mm cables)	2.60	3.30	3.80	4.50	4.90	8.20
Packing Length (mtrs.) 0.4mm & 0.5mm cables.	100	100	100	100	100	100

COLOUR COMBINATIONS	1 pair	2 pair	3 pair	4 pair	5 pair	10 pair
	White - Blue	White - Blue	White - Blue	White - Blue	White - Blue	White - Blue
	-	White - Orange	White - Orange	White - Orange	White - Orange	White - Orange
	-	-	White - Green	White - Green	White - Green	White - Green
	-	-	-	White - Brown	White - Brown	White - Brown
	-	-	-	-	White - Grey	White - Grey
	-	-	-	-	-	Red - Blue
	-	-	-	-	-	Red - Orange
	-	-	-	-	-	Red - Green
	-	-	-	-	-	Red - Brown
	-	-	-	-	-	Red - Grey

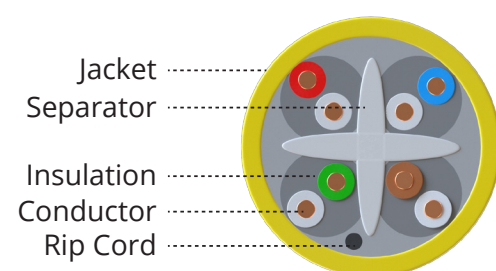


Colour Code

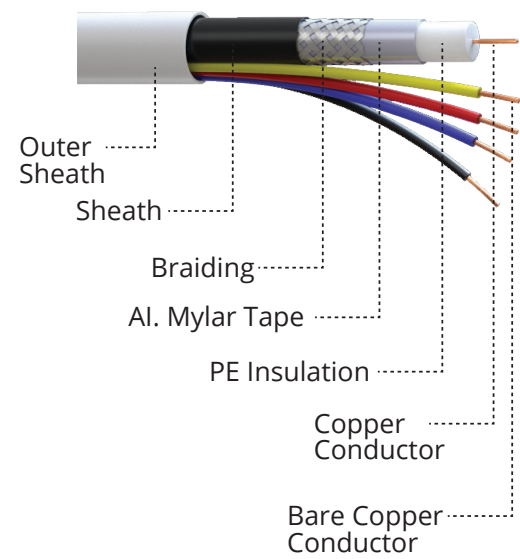

CCTV Cables

This CCTV 4+1 construction cable is of hybrid type with combination of Communication and Electrical conductors. The 4 power cores enable powering of the CCTV camera. This cable used for combination of communication and electrical supply to CCTV Cameras & due to its composite component nature it allows CCTV installations tidy & provides lossless out . The communication cable (RG 59 Co-Axial Cable) is used for recording the images by the camera and to communicate with the data center. Co-axial cables are designed to transmit the complete video frequency range with minimum distortion or attenuation, making them an excellent choice for CCTV. The 4 number of wires in this CCTV cables are used for powering the cameras.

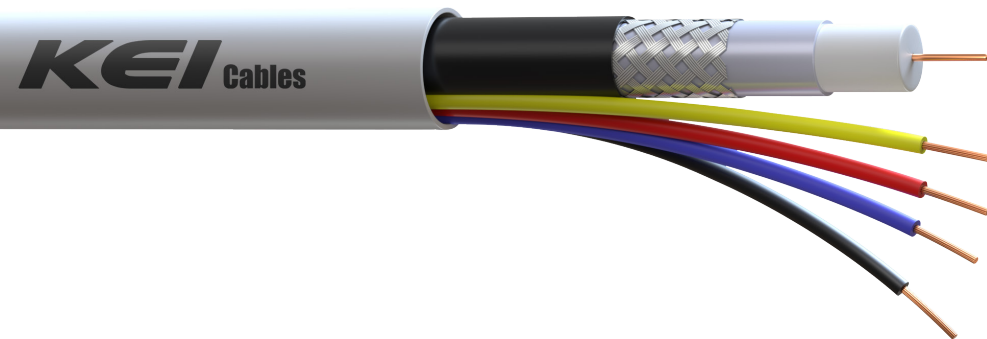

Construction Parameters: Co-axial Cable (RG 59)

INNER CONDUCTOR	
Material	Solid Bare Copper
Diameter	0.81 mm (approx.)
DIELECTRIC	
Material	Physical Foam Polyethylene
Diameter	3.60 mm (approx.)
SHIELD	
1st Shield	Bonded Aluminium Tape
2nd Shield	Aluminium Alloy Braid
Coverage	Min. 60%
JACKET	
Material	PVC (Black)
Diameter	6.10 mm (approx.)
Bending Radius	40 mm (approx.)

ELECTRIC DATA

Inner Conductor dc Resistance	Max. 3.55 Ω /Km at 20°C
Capacitance (Nom.)	53.0 pF/m
Characteristic Impedance	75 $\pm$ 3 ohm
Structural Return Loss	Min. 15 dB @ 1 – 1000 MHz
Nominal Velocity Ratio	Min. 82%

PERFORMANCE

FREQUENCY	Max. Attenuation (db/100 m) at 20°C
55 MHz	6.73
211 MHz	12.47
300 MHz	14.60
550 MHz	19.52
750 MHz	22.87
870 MHz	24.85
1000 MHz	26.64

INSULATED POWER CORES

No. of Cores	Conductor Diameter (Nom.) Solid or Flexible Bare Annealed Copper	Insulation Material	Core Diameter	Colour Codes	Overall Jacket (PVC) White	Overall Diameter
4	Solid - 0.50mm or Flex - 7/0.188mm	High Density Polythene	0.9 mm	Red, Yellow, Blue, Black	PVC ST1 Conforming to IS 5831	8.0mm max.